



Ares 12

GSM remote metering device with free portal for central Device management. SMS, Voice calls & Email Alarming included.



You can connect:

Up to 14 sensors

- Temperature (Pt1000)
- Relative Humidity
- Carbon dioxide
- Water Leak Detection
- Atmospheric pressure
- Current (4-20 mA)
- Voltage sensor

2x DI (Digital Inputs)

- Power presence
- Smoke detection
- Door contact

The HWg-Ares 12 is a cost-effective GSM remote monitoring and alerting device for remote locations without LAN access. Connect up to 14 external sensors and 2 DI for external detectors with relay output.

Ares can be configured locally via USB or remotely from the HWg-cloud.com.

Ares can also be connected to any SensDesk portal.

SensDesk is remote Monitoring and Alerting system which can be installed on the customer's site. Ares continuously analyzes state and values of connected external sensors. When a value reaches the alarm threshold, Ares can be configured as standalone alerting device (sending Email, SMS or dials Voice Call).

Up to 14 external sensors

Connect up to 14 external sensor values (RJ11) bus (max. 60 metres). Sensors of current, voltage, temperature, light intensity, CO₂ and VoC are available.

2x DI for external detectors

To DI (Digital Input) you can connect 2 external detectors (0/1) with relay output. Detectors of smoke, air-flow, flood, power presence are available.

Data graphs on the website

HWg-cloud.com or SensDesk service can receive data from the device and show value graphs. Data can be also sent in e-mail attachments or downloaded via USB.

Remote configuration

The device can be configured remotely at the "AresConf" tab in the HWg-cloud or SensDesk portal.

5x E-mail / 5x SMS+Ring


User can be alerted from the device by email or by calling and texting up to 5 numbers. HWg-cloud or SensDesk can be also used for alerting.

Standalone / IoT Monitoring

Device can be used as standalone alerting unit with remote web configuration over HWg-cloud.com service. Or it can be IoT monitoring device, connected to the portal, where all alarming / reporting is realized from the portal.

Typical application examples

- Electricity distribution networks (transformer stations, lines)
- Water source monitoring, including technical equipment status
- Agricultural premises (greenhouses, granaries, etc.)
- Road, highway, or railroad technology
- Temperature and thermal expansion of structures
- Diesel generators – environment and status monitoring

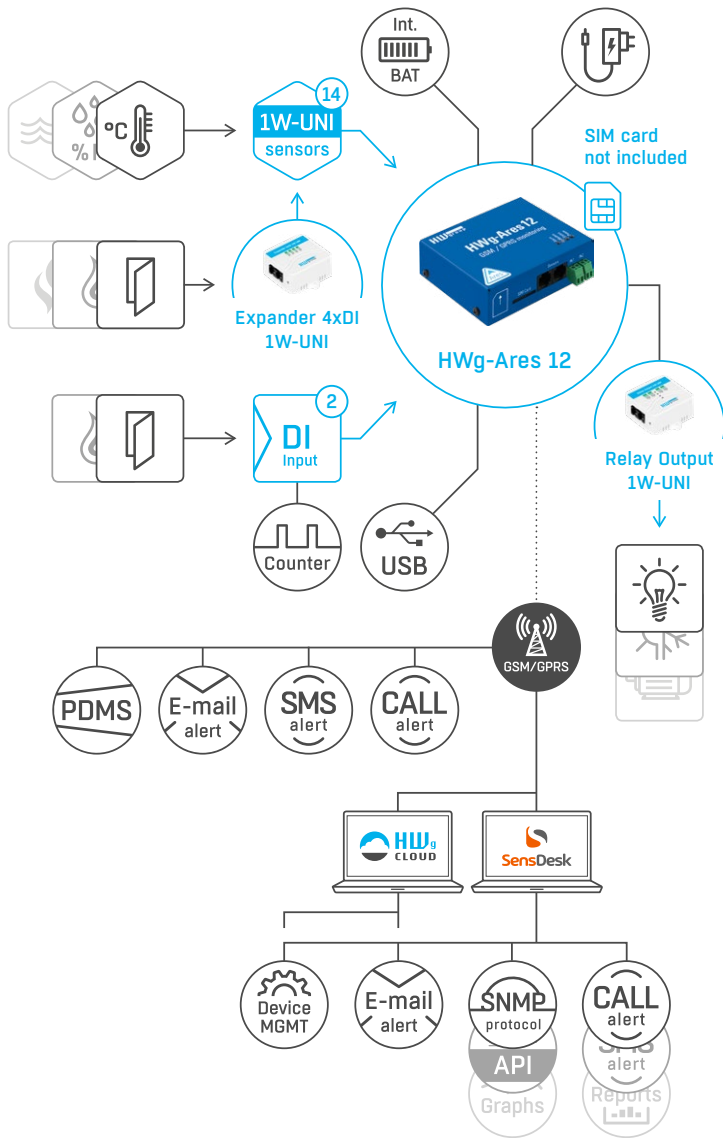

GSM / GPRS	
Interface	Quad-Band 850/900/1800/1900 MHz, GPRS class 10/8 Compliant to GSM phase 2/2 – Class 4 (2W @ 850/900MHz) – Class 1 (1W @ 1800/1900MHz)
Supported protocols	IP: TCP, UDP, HTTP, SNMP, SMTP, HWg-PUSH

Sensors	
Type	HWg original accessories: RJ11 sensors
Connector	2× RJ11 port (1-Wire UNI)
Sensors	Up to 14 sensor values
Sensor distance	Up to 60 m

Dry contact inputs	
Port	I1, I2
Type	Digital Input (Dry contact) + Pulse counter (32bit)
Sensitivity	1 (0n) = 0-500 Ω (Right pin on the terminal block can be connected to 12V GND)
Max. distance	Up to 50 m

Power input	
Port	9–30 V DC
Type	Main device power input (typically 500 mA)
Connector	Jack (barrel, inner 2,1mm outer 5,5mm) + Terminal Block

Physical parameters	
Temperature range	Operating: 5 to +50 °C (+41 to +122 °F) Storage: -25 to +85 °C (-13 to +185 °F)
Dimensions / Weight	76×93×31 mm / 150 g
EMC	FCC Part 15, Class B, CE - EN 55022, EN 55024, EN 61000

Differences between Ares 12 vs. Ares 10

	Ares 12	Ares 10
Sensor values	14×	6×
External Relay Outputs compatible	✓	✗
Internal rechargeable battery	✓	✗

Versions and related products



Ares 12 LTE plain
Plain unit is just Ares 12 LTE device without accessories.



HWg-Ares 12 Tset
HWg-Ares 12 startup package with temperature sensor, power adapter, external antenna, USB cable.



Ares 10 LTE plain
Plain unit is just Ares 10 LTE device without accessories.



Expander 4xDI 1W-UNI
Expands one 1-Wire UNI to four digital inputs



Converter 2xPt100 1W-UNI
Double converter for Pt100 and Pt1000 probes